

# TENDA



www.locomotiva.com.br

#### **Features**

- PVC laminate reinforced with polyester fabric;
- 2 reinforced fabric options, 2x2 or 3x3;
- Resistant to tears and high temperatures;
- High durability;
- Withstands strong traction;
- Anti-UV, anti-fungal and antioxidant additives that prevent the canvas from yellowing and drying out;
- Blocks sunlight;
- 100% waterproof;
- Easy cleaning and maintenance;
- Easy to use when handling and welding;
- Ideal up to 10 m x 10 m;
- 12-month warranty.

### Conservation and Cleaning

- Wash the laminate periodically;
- During cleaning:
  - Avoid washing in intense sunshine;
  - Wet with plenty of running water;
  - Use only neutral soap with a soft sponge or cloth;
  - Do not use solvents or chemical products;
- Avoid folding, always store rolled up.



# **TD** Fabric 3.5x3.5

Material suitable for environments where **partial** (natural) lighting and color without high contrast (ice) with the interior decoration is needed.

Grammage (g/m²)	480 (± 7%)
Thickness (mm)	0.40 (± 0.03)
Width (m)	1.40 x 50 (± 0.02)






## TD BO Fabric 3.5x3.5


Material suitable for environments where it is necessary to completely block the passage of natural light, allowing for:

- internal color combination;
- internal color (ice) without high contrasts.

Grammage (g/m²)	490 (± 7%)
Thickness (mm)	0.42 (± 0.03)
Width (m)	1.40 x 50 (± 0.02)



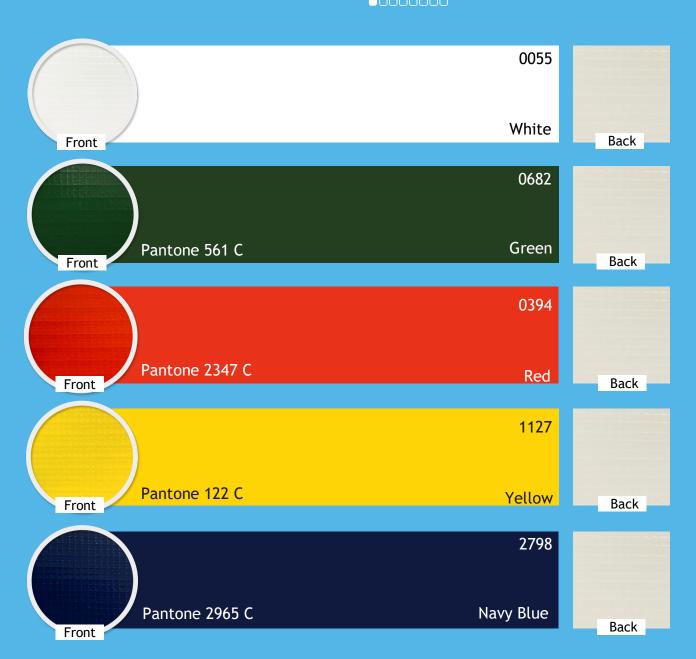

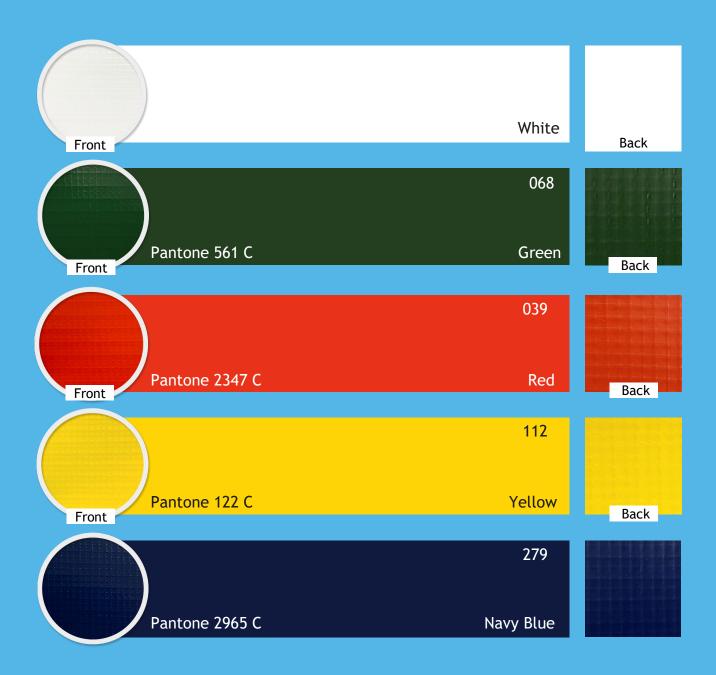

# Durability



Awning size



### Resistance



Passage of light







